

JAMIESON
FENCE SUPPLY

800.527.6464



VALUTRAC™ ALUMINUM V-TRACK SLIDING GATES

Jamieson's ValuTrac™ Aluminum V-Track Sliding Gates are capable of spanning large openings with stability unequalled in the industry. All gates are fully welded under factory controlled conditions. Where the overall length of the gate exceeds shipping constraints, the gate is shipped in two sections with prefabricated splice provisions for simple reassembly at the job site. All ValuTrac™ gates ship ready for immediate installation and include all hardware for manual operation.



VALUTRAC™ GATE SERIES	TYPICAL USE	MAX SINGLE DRIVE GATE OPENING	MAX DOUBLE DRIVE GATE OPENING
SERIES 1500	STANDARD USE	20'	40'
SERIES 2500	MEDIUM DUTY USE	30'	60'
SERIES 3500	HEAVY DUTY USE	50'	100'
SERIES 4500	HEAVY DUTY USE WITH LARGE GATE OPENINGS	60'	120'


LIGHT WEIGHT AND DURABLE

ValuTrac™ gate frames are constructed from durable 6063-T52 structural aluminum to provide exemplary life, durability and rust resistance. Each gate is custom fabricated to the exact opening to achieve superior balance, rigidity and squareness. Each bay is equidistant, a maximum of 6 ft wide and braced with (4) welded solid gusset plates. End bays include a heavier wall vertical member with horizontal bracing and a second vertical support member provide improved durability, greater chain link tension (if applicable) and the opportunity to relocate operator chain brackets or drive rail from the end of the gate, eliminating a protrusion. Each gate series is constructed from specific structural members determined by the application and gate span to strengthen the gate and improve stability. Properly oriented stainless steel aircraft truss cables are provided in each bay through the entire gate length, virtually eliminating sagging and stretching of the cable. Filler materials extend through the tail section of each gate for safety and symmetry. Each gate is reversible and can open to either side, eliminating the need to specify opening direction. Jamieson provides a complete line of gate hardware and accessories. Our manufacturing operations are certified to AWS D1.1/D1.1M and D1.2/D1.2M and can provide the technological and manufacturing expertise to meet your custom requirements.

HEAVY DUTY MAINTENANCE FREE WHEELS

Depending on size of gate, either (2) or (3) 6 in. solid steel power wheels weighing 12.5 lb. each with 5,000 lb. capacity and sealed bearings are included with each ValuTrac™ gate produced. The wheels are mounted inside custom wheel-wells to maintain low ground clearance. The wheels are maintenance free with no grease fittings.

Submittal drawings provided by Jamieson. Job Specific drawings available on request.

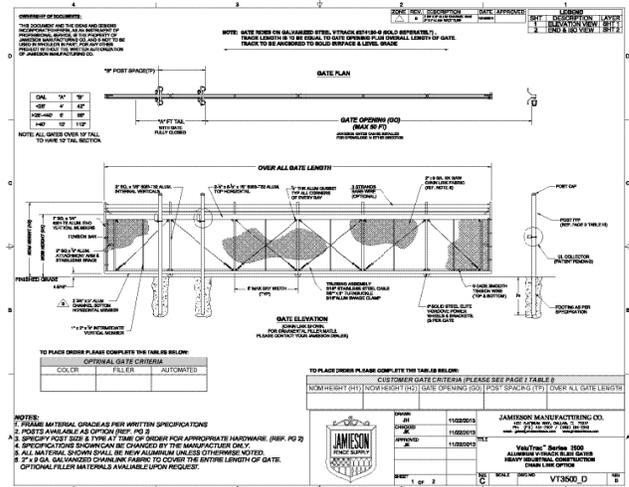

ORNAMENTAL AND CUSTOM FILLER MATERIALS

Whether creating a new ornamental design, matching custom fencing, substituting for riveted or field assembled gates, meeting high security applications or unique applications, our Engineering team and custom fabrication shop can provide design support, develop 3 part specs and manufacture the gate to meet your requirements.

SAFETY FIRST!

Jamieson follows the standards developed by Underwriter’s Laboratory (U.L. 325) and ASTM F2200 as developed by ASTM International for all ValuTrac™ gates, regardless of manual or automated applications.

WARRANTY

Jamieson provides a 5-year limited warranty on ValuTrac™ gates.

TECHNICAL SERVICES

JAMIESON FENCE SUPPLY
TECHNICAL SALES DEPARTMENT
PHONE: 888-286-3362
FAX: 281-879-5558
WWW.JAMIESONFENCE.COM