

Chain Link Products



Master Halco®... The industry leader in chain link fencing solutions

From humble beginnings in 1951 in an El Monte, California garage, Master Halco has grown and evolved to become the world leader in the manufacturing and distribution of complete fencing and decking solutions.

Starting as Master Fence Fittings, originally producing a limited variety of chain link fittings, the company quickly grew by adding pipe and chain link fabric to offer a complete wholesale-only source of chain link products to contractors.

Over the next ten years, Master Fence Fittings expanded operations to include branch offices in California and a wood fencing distributorship in Colorado. In addition, they began to manufacture vinyl coated chain link fence fabric in Illinois, which was a logical addition to the expanding product line.

By the early 1980's, Master Fence Fittings purchased Halco Fence & Wire, adding twelve service centers and one manufacturing plant specializing in galvanized chain link fence fabric, and combined the names of the companies to create Master Halco. Because customers wanted an even wider variety of fence systems and related

materials, ornamental iron and vinyl/PVC fencing were added to the expanding product line, making Master Halco a one-stop source for complete fencing solutions. In 1995, Master Halco established itself as an international distributor with the creation of Master Halco Ltd. in Canada, with three locations to efficiently serve Canadian customers.

Today, Master Halco continues to grow, combining advances in technology and automation with new branch locations to better serve local fencing and decking markets across the nation, earning their place as the premier source for complete outdoor building projects.

Founded on the principles of quality and value, distribution excellence and dedicated customer support, Master Halco has set the industry standard for world class fencing and decking solutions.



Company Milestones... Then & Now

1950

1970

1980

1951

Master Fence Fittings was established in a garage with two small punch presses in 1951 by Donovan O'Donnell in El Monte, California, producing a limited variety of chain link fittings.

1957

In 1957, Master Fence Fittings moved from El Monte to La Habra, establishing a sales office and manufacturing plant on La Habra Boulevard that served as its dedicated headquarters and distribution hub.

1972

Olney, Illinois became Master Fence Fittings' sixth branch in 1972, and its second manufacturing facility. The company began to manufacture vinyl coated chain link fence fabric as a logical addition to its existing product line.

1980

In December of 1980, Master Fence Fittings purchased Halco Fence & Wire, creating the name you know and trust today: Master Halco. This acquisition added 12 service centers and one manufacturing plant, specializing in galvanized chain link (GAW) fence fabric.

Chain Link Fencing... Economical, versatile, durable, and secure

For over a century, chain link fencing has been one of the most popular fencing solutions available and is the leading way to create a safe and protected perimeter environment.

Ideal for residential and commercial applications, no other fencing can offer the benefits of durability and security with flexibility and value like chain link. Industrial property owners prefer chain link to protect corporate assets and prevent intrusion. Combined with access control system gates and barbed wire, chain link can offer enhanced security at an economical cost. It's also a natural for fencing yards, playgrounds, and sports fields.

Whether you choose galvanized or the contemporary color and enhanced durability of Spectra® and Permafused® chain link, there is a choice to suit every aesthetic, security, and value requirement. From oceanfront to urban settings and everything in between, premium chain link fence systems from Master Halco offer a complete fencing solution.

World-class manufacturing sets the standard for quality.

Master Halco employs state-of-the-art manufacturing technology to produce the highest quality chain link product available in the market today.

Combined with the industry's most experienced manufacturing team, Master Halco provides customers with products that set the standard in the industry for quality and value. Computer aided design, resulting in innovative product development, statistical process control and commitment to automation for increased customer service are all a part of our ongoing goal to strive for excellence.



1990

2000

2010

1995

MASTER HALCO successfully established itself as an international distributor in 1995 with the creation of Master Halco Ltd. in Canada. Consistent with our commitment of being close to our customers, three locations provide an efficient way to service our Canadian clientele.

1999

In 1999, Master Halco debuted the logo that still represents us today. More than a new look, it marked our evolution into a stronger, unified brand entering a new century.

2005

In 2005, Master Halco expanded its reach into Quebec with the acquisition of Clôtures Lasalle Ltée and Clôtures Bel-Air Ltée. These respected local names strengthened our Canadian roots and brought decades of fencing expertise into the Master Halco family, while proudly preserving the Bel-Air legacy that continues today.

2010

From expanding our footprint to introducing new products, the next two decades brought major growth for Master Halco. Acquisitions like Jamieson Fence Supply and The Deck Superstore strengthened our reach and expertise. The launch of PostMaster®+ in 2019, followed by PostMaster® v3 and RailMaster™ in 2025, expanded our offerings, and adding Fence & Deck Supply to our logo solidified our presence in the decking market. Together, these changes reflect our ongoing commitment to better serving our valued customers.

Galvanized Chain Link... made to be versatile

Galvanized hot-dipped zinc coating is the most popular and inexpensive method for protecting chain link fence systems. Preferred for decades to define property lines and protect property, galvanized chain link offers a versatile fencing solution that will provide years of maintenance-free protection.

Security



Highway



Commercial



Galvanized Fencing System

All steel components are hot-dip zinc coated and guaranteed for 12 years.



12 Year Warranty



Meets and Exceeds
all ASTM Standards


Galvanized After Weaving (GAW)

This process forms or weaves chain link into a fabric first, and then soaks it in a large galvanized bath which adheres the zinc coating. This ensures that all the wire is coated, even the cut ends created during the weaving process.



Galvanized Before Weaving (GBW)

In this process, the wire is pre-galvanized before it is formed into a fabric. The weaving process creates an exposed cut end that will lack coating and be more apt to some minor rust in wet and severe weather conditions.





Residential



Schools




Construction



Framework and Fittings

Master Halco offers the highest quality matching framework, fittings and accessories for galvanized fencing systems, stocking the largest assortment of domestic and imported pipe, tube and fittings to satisfy any job specification.

Available Mesh Sizes

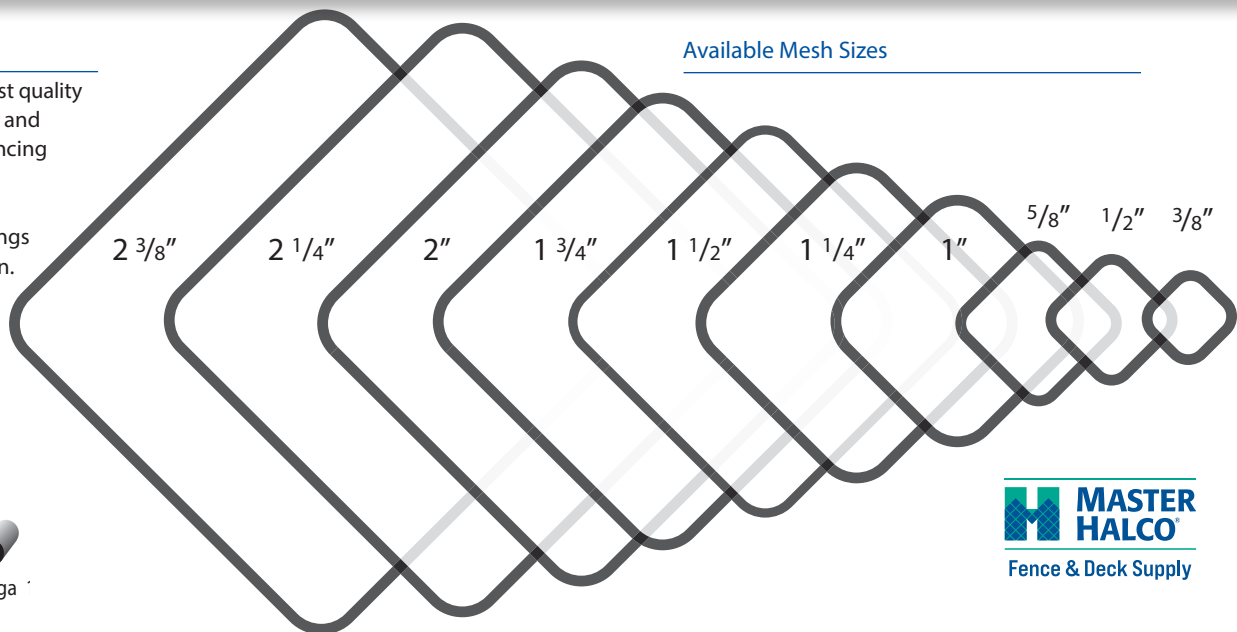

Available Wire Gauges

The gauges available are:



Spectra® Color Chain Link... made to perform

Spectra® is the latest generation of Master Halco's residential, commercial and industrial chain-link fence systems. It provides the corrosion protection of zinc, with the durability and attractive appearance of a colored polyester framework and extruded PVC fabric, to ensure years of attractive and reliable performance that blends in beautifully with the environment.

Pets



Parks



Property Lines



Our Spectra Fencing System

Premium quality frame and fabric is guaranteed for 15 years.



15 Year Warranty

Features and Benefits:

- Zinc-coated steel framework is thoroughly cleaned during the pre-treatment process, then color coated with a 3 mil minimum polyester layer for protection from corrosion.
- All galvanized wire has a 15 mil minimum extruded polyvinyl chloride coating for dual protection from corrosion and the elements.
- Fittings are made of galvanized steel with a 3 mil minimum of polymer layer for protection from corrosion.




Residential



Schools



Privacy Fencing

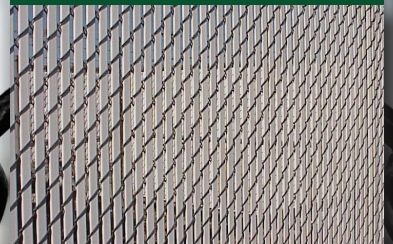

Available Colors

Choose from 3 serene colors that blend in perfectly with the environment. Spectra® defines property lines, and will add value to any residential or commercial property. Custom colors available upon request.



Midnight Black



Forest Green



Sierra Brown

Available Wire Gauges (Finish and Core)

Use the finish gauge number when ordering.

6 gauge finish
9 gauge core



8 gauge finish
11 gauge core




9 gauge finish
13 gauge core



11 gauge finish
14 gauge core



Available Mesh Sizes

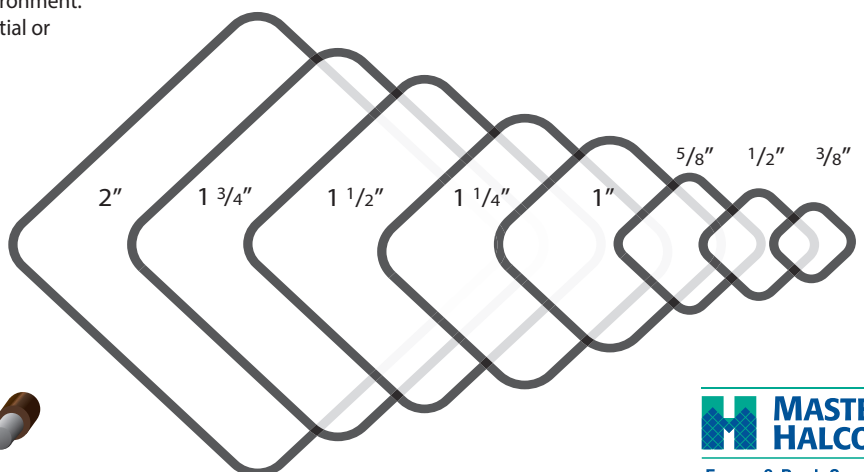

Spectra Bond® Color Chain Link... made to withstand

Spectra Bond® is a step above for Master Halco's color commercial and industrial chain link fence systems. It is extruded bonded wire, which is a better alternative to simple extruded wire. The adhesive added before the wire is extruded seals the vinyl to the wire. This ensures years of attractive and reliable performance with a better protection against nature.

Ball Parks



Perimeter Fence



Tennis Courts



Our Spectra Bond® Fencing System

Premium quality fabric and framework is guaranteed for 15 years.



15 Year Warranty

Features and Benefits:

- Zinc-coated steel framework is thoroughly cleaned during the pre-treatment process, then color coated with a 3 mil minimum polyester layer for protection from corrosion.
- All galvanized wire has a 15 mil minimum extruded and adhered polyvinyl chloride coating for dual protection from corrosion and the elements.
- Fittings are made of galvanized steel with a 3 mil minimum of polyester coating for added protection.



Meets and Exceeds
all ASTM Standards



Schools



Government Facilities



High-Security Facilities



Available Colors

Choose from 3 Spectra Bond® colors that will enhance any installation and blend in beautifully with any environment. Custom colors available upon request.



Midnight Black



Forest Green



Sierra Brown

Available Wire Gauges (Finish and Core)

Use the core gauge number when ordering.


6 gauge finish
9 gauge core



8 gauge finish
11 gauge core



Available Mesh Sizes

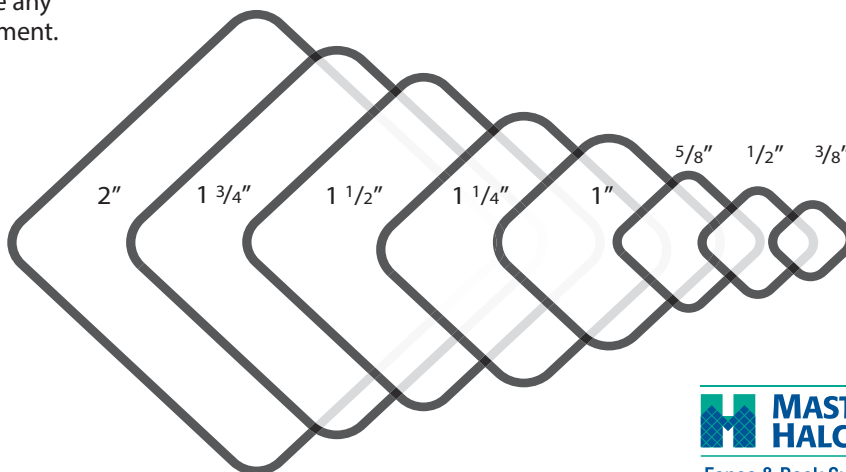

Permafused® Color Chain Link... made to be durable

Permafused, the next generation in color chain link fence systems, offers unparalleled performance over ordinary systems, featuring a heavy mill coating that offers superior protection. Its outstanding resistance to ultra violet light and corrosive environments prevents premature fading and decay. It is an ideal choice for commercial applications that need the security of a chain link fence system and an appearance that blends in beautifully with the environment.

Golf Courses



Perimeter Fence



Tennis Courts



Our Permafused Fencing System

Master Halco offers the highest quality products with unmatched reliability.



15 Year Warranty

Features and Benefits:

- Outstanding performance in highly corrosive environments provides years of protection.
- High impact resistance reduces the chance of damage during product handling and installation.
- Exceptional resistance to ultra violet light prevents premature fading.
- Extreme flexibility reduces susceptibility to cracking and chipping, even in changing weather conditions.
- 15 year limited warranty provides confidence and assurance that you've selected one of the best color chain link fence systems available.



Meets and Exceeds
all ASTM Standards



Schools



Government Facilities



High-Security Facilities



Available Colors


Choose from 3 PermaFused colors that will enhance any installation and blend in beautifully with any environment.




Midnight Black Forest Green Sierra Brown

Available Wire Gauges (Finish and Core)

Use the core gauge number when ordering.

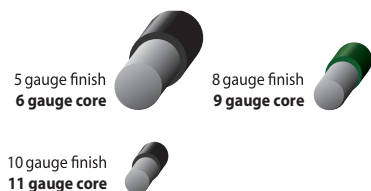

Available Mesh Sizes

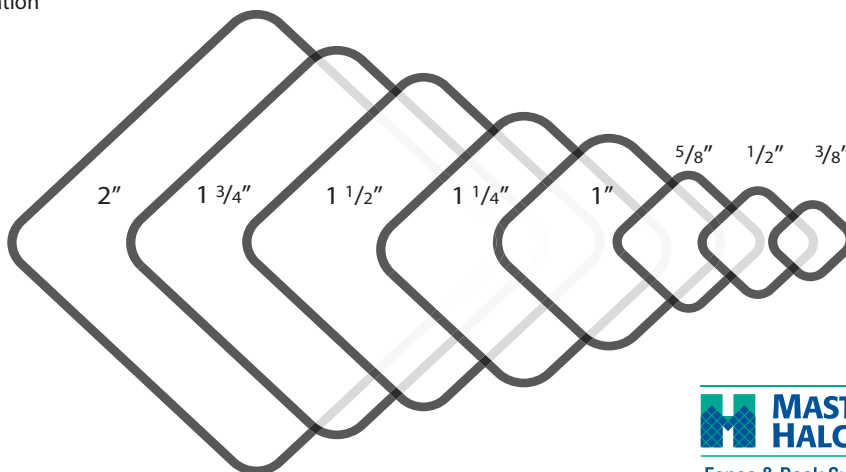

Galvanized Chain Link Recommendations

Residential

Fabric Type	Galvanized After Weaving and Galvanized Before Weaving
Fabric Gauge	9, 11, and 11.5 gauge
Fabric Mesh	1-1/4", 2", 2-1/4", and 2-3/8"
Fabric Height	3', 42", 4', 5', and 6'
Fabric Selvage	Knuckle - Knuckle (KK) for 5' and Under. Knuckle - Knuckle (KK) or Knuckle - Twist (KT) for 6'.

Top Rail

3' to 5' High	1-3/8" O.D. 17 Gauge 1-3/8" O.D. 16 Gauge
6' High and over	1-3/8" O.D. 17 Gauge 1-3/8" O.D. 16 Gauge 1-5/8" O.D. 16 Gauge

Line Posts

3' to 5' High	1-5/8" O.D. 16 Gauge
6' High and over	1-7/8" O.D. 16 Gauge

Terminal Posts

3' to 5' High	1-7/8" O.D. 16 Gauge 2-3/8" O.D. 16 Gauge
6' High and over	2-3/8" O.D. 16 Gauge

Gates

Fabric	Same Gauge and Mesh as Chain Link Selected
Frame	Same as Top Rail Selected

Fittings

Tension and Brace Bands	Hot-Dipped Galvanized Pressed Steel
Caps, Eye Tops, Rail Ends	Malleable, Cast Iron Steel, Pressed Steel, or Die Cast Aluminum
Tie Wires	Aluminum or Galvanized Steel

Slats - Privacy

Material Composition	Polyethylene Thermoplastic
Colors	Green, Black, Brown, Gray, White, Redwood, Blue, Desert Sand

Commercial

Galvanized After Weaving
6, 9, and 11 gauge
3/8", 1/2", 5/8", 1", 1-1/4", 1-1/2", 1-3/4", and 2"
3', 42", 4', 5', 6', 7', 8', 9', 10', and 12'
Knuckle - Knuckle (KK) for 5' and Under. Knuckle - Knuckle (KK) or Knuckle - Twist (KT) for 6' and over.

Top Rail

1-5/8" O.D. Deluxe Quality (DQ) 1-5/8" O.D. Full Weight Pipe
1-5/8" O.D. Deluxe Quality (DQ) 1-5/8" O.D. Full Weight Pipe

Line Posts

1-7/8" O.D. Deluxe Quality (DQ) 1-7/8" O.D. Full Weight Pipe 2-3/8" O.D. Commercial Quality (CQ) 2-3/8" O.D. Deluxe Quality (DQ) 2-3/8" O.D. Full Weight Pipe
2-3/8" O.D. Commercial Quality (CQ) 2-3/8" O.D. Deluxe Quality (DQ) 2-3/8" O.D. Full Weight Pipe

Terminal Posts

3' to 5' High	2-3/8" O.D. Commercial Quality (CQ) 2-3/8" O.D. Deluxe Quality (DQ) 2-3/8" O.D. Full Weight Pipe 4" O.D. Commercial Quality (CQ) 4" O.D. Deluxe Quality (DQ) 4" O.D. Full Weight Pipe
For Heavy Gates	6-5/8" O.D. Full Weight Pipe 8-5/8" O.D. Full Weight Pipe

Spectra® and Spectra Bond® Color Chain Link Recommendations

FABRIC

Spectra® polyvinyl chloride extruded over zinc-coated steel core wire.

	Type 2 Residential	Type 2 Commercial
Fabric Gauge	9 gauge and 11 gauge finish	6 gauge, 8 gauge, and 9 gauge finish 6 gauge is not available for 3/8" mesh, 1/2" mesh, or 5/8" mesh
Fabric Mesh	1-1/4", 1-1/2", 1-3/4", and 2"	3/8", 1/2", 5/8", 1", 1-1/4", 1-1/2", 1-3/4", and 2"
Fabric Height	3', 42", 4', 5', and 6'	3', 42", 4', 5', 6', 7', 8', 9', 10', and 12'
Fabric Selvage	Knuckle - Knuckle (KK) for 5' and Under. Knuckle - Knuckle (KK) or Knuckle - Twist (KT) for 6'.	Knuckle - Knuckle (KK) for 5' and under; for mesh sizes 1" and smaller. Knuckle - Knuckle (KK) or Knuckle - Twist (KT) for 6' and over.
Top Rail	1-3/8" O.D. Spectra® 17 Gauge or 16 Gauge	1-5/8" O.D. Spectra® Deluxe Quality (DQ) or Spectra® Full Weight Pipe
Line Posts	1-5/8" O.D. Spectra® 17 Gauge or 16 Gauge	1-7/8" O.D. Spectra® Deluxe Quality (DQ) or Spectra® Full Weight Pipe 2-3/8" O.D. Spectra® Deluxe Quality (DQ) or Spectra® Full Weight Pipe
Terminal Posts	1-7/8" O.D. Spectra® 16 Gauge	2-3/8" O.D. Spectra® Deluxe Quality (DQ) or Spectra® Full Weight Pipe
	2-3/8" O.D. Spectra® 16 Gauge	2-7/8" O.D. Spectra® Deluxe Quality (DQ) or Spectra® Full Weight Pipe
		4" O.D. Spectra® Deluxe Quality (DQ) or Spectra® Full Weight Pipe

FRAMEWORK - TYPE 2

Spectra® polyester resin, 3 mils minimum, over galvanized steel ASTM F 1043, Group 1C, with a minimum yield strength of 50,000 PSI. Protective coating per ASTM 1043, external coating Type B, zinc with organic overcoat, 0.9 ounces per square foot minimum zinc coating with chromate conversion coating and verifiable polymer film.

Slat Privacy Fittings Gates	Fabric	Same Gauge and Mesh as Chain Link Selected
	Frame	Same as Top Rail Selected
	Tension and Brace Bands	Polymer Coating, 3 Mils Minimum, Over Hot-Dipped Galvanized Pressed Steel
	Caps, Eye Tops, Rail Ends	Polymer Coating, 3 Mils Minimum, Over Hot-Dipped Galvanized Pressed Steel or Aluminum
	Sleeves	Polymer Coating, 3 Mils Minimum, Over Hot-Dipped Galvanized Steel
	Tie Wires	Polymer Coating, 3 Mils Minimum, Over Zinc-Coated Steel Wire
	Material Composition	Polyethylene Thermoplastic
	Colors	Green, Black, Brown, Gray, Redwood, Blue, Desert Sand

FABRIC

Spectra Bond® Polymer Coating Extruded and Adhered to Zinc-Coated Steel Wire per ASTM F 668 Class 2a.

Fabric Gauge	9 gauge and 11 gauge core 9 gauge is not available for 3/8" mesh, 1/2" mesh, or 5/8" mesh	
Fabric Mesh	3/8", 1/2", 5/8", 1", 1-1/4", 1-1/2", 1-3/4", and 2"	
Fabric Height	3', 42", 4', 5', 6', 7', 8', 9', 10', and 12'	
Fabric Selvage	Knuckle - Knuckle (KK) for 5' and Under; for mesh sizes 1" and smaller. Knuckle - Knuckle (KK) or Knuckle - Twist (KT) for 6' and over.	
	TYPE 1	TYPE 2
Top Rail	1-5/8" O.D. Polyester Standard Weight Pipe (0.140" wall thickness, 2.27 lb./ft.)	1-5/8" O.D. Polyester Deluxe Quality (DQ) Pipe (0.111" wall thickness, 1.83 lb./ft.)
Line Posts	2-3/8" O.D. Polyester Standard Weight Pipe (0.154" wall thickness, 3.65 lb./ft.)	2-3/8" O.D. Polyester Deluxe Quality (DQ) Pipe (0.130" wall thickness, 3.12 lb./ft.)
Terminal Posts	2-7/8" O.D. Polyester Standard Weight Pipe (0.203" wall thickness, 5.79 lb./ft.)	2-7/8" O.D. Polyester Deluxe Quality (DQ) Pipe (0.160" wall thickness, 4.64 lb./ft.)

FRAMEWORK - TYPE 1

Spectra® Polyester, 3 mils minimum, over galvanized steel ASTM F 1043, Group 1a, standard weight pipe, schedule 40. Hot-dipped galvanized with a minimum average 1.8 ounces per square foot of zinc-coated surface area. Note: Heavy Mil Schedule 40 available upon request.

FRAMEWORK - TYPE 2

Spectra® Polyester, 3 mils minimum, over galvanized steel ASTM F 1043, Group 1c, with a minimum yield strength of 50,000 PSI. Protective coating per ASTM F 1043, external coating type B, zinc with organic overcoat, 0.9 ounces per square foot minimum zinc coating with chromate conversion coating and verifiable polymer film. Note: Heavy Mil Schedule 40 available upon request.

Slat Privacy Fittings Gates	Fabric	Same Gauge and Mesh as Chain Link Selected
	Frame	Same as Top Rail Selected
	Tension and Brace Bands	Polyester Coating, 3 Mils Minimum, Over Hot-Dipped Galvanized Pressed Steel
	Caps, Eye Tops, Rail Ends	Polyester Coating, 3 Mils Minimum, Over Hot-Dipped Galvanized Pressed Steel or Aluminum
	Sleeves	Polyester Coating, 3 Mils Minimum, Over Hot-Dipped Galvanized Steel
	Tie Wires	Polyester Coating, 3 Mils Minimum, Over Zinc-Coated Steel Wire
	Material Composition	Polyethylene Thermoplastic
	Colors	Green, Black, Brown, Gray, Redwood, Blue, Desert Sand

Permafused® Color Chain Link Recommendations

FABRIC

Permafused® Polyolefin Coating Fused and Adhered to Zinc-Coated Steel Core Wire per ASTM F Class 2b.

Fabric Gauge	6 gauge, 9 gauge, and 11 gauge core 6 gauge is only available for 2" mesh and 1-3/4" mesh 9 gauge is not available for 3/8" mesh
Fabric Mesh	3/8", 1/2", 5/8", 1", 1-1/4", 1-1/2", 1-3/4", and 2"
Fabric Height	3', 42", 4', 5', 6', 7', 8', 9', 10', and 12'
Fabric Selvage	Knuckle - Knuckle (KK) for 5' and Under; for mesh sizes 1" and smaller. Knuckle - Knuckle (KK) or Knuckle - Twist (KT) for 6' and over.

FRAMEWORK - TYPE 1

Spectra® Polyester, 3 mils minimum, over galvanized steel ASTM F 1043, Group 1C, with a minimum yield strength of 50,000 PSI. Protective coating per ASTM 1043, external coating Type B, zinc with organic overcoat, 0.9 ounces per square foot with chromate conversion and verifiable polymer film.

FRAMEWORK - TYPE 2

Permafused® Heavy Mil, 15 mils minimum, over galvanized steel ASTM F 1043, Group 1C, with a minimum yield strength of 50,000 PSI. Protective coating per ASTM F 1043, external coating type B, zinc with organic overcoat, 0.9 ounces per square foot minimum zinc coating with chromate conversion coating and verifiable polymer film.
Note: Heavy Mil Schedule 40 available upon request.

Top Rail	1-5/8" O.D. Polyester Standard Weight Pipe (0.140" wall thickness, 2.27 lb./ft.)	1-5/8" O.D. Polyester Deluxe Quality (DQ) Pipe (0.111" wall thickness, 1.83 lb./ft.)
Line Posts	2-3/8" O.D. Polyester Standard Weight Pipe (0.154" wall thickness, 3.65 lb./ft.)	2-3/8" O.D. Polyester Deluxe Quality (DQ) Pipe (0.130" wall thickness, 3.12 lb./ft.)
Terminal Posts	2-7/8" O.D. Polyester Standard Weight Pipe (0.203" wall thickness, 5.79 lb./ft.)	2-7/8" O.D. Polyester Deluxe Quality (DQ) Pipe (0.160" wall thickness, 4.64 lb./ft.)

Gates

Fabric	Same Gauge and Mesh as Chain Link Selected
Frame	Same as Top Rail Selected

Fittings

Tension and Brace Bands	Polyester Coating, 3 Mils Minimum, Over Hot-Dipped Galvanized Pressed Steel
Caps, Eye Tops, Rail Ends	Polyester Coating, 3 Mils Minimum, Over Hot-Dipped Galvanized Pressed Steel or Aluminum
Sleeves	Polyester Coating, 3 Mils Minimum, Over Hot-Dipped Galvanized Steel
Tie Wires	Polyester Coating, 3 Mils Minimum, Over Zinc-Coated Steel Wire

Slats - Privacy

Material Composition	Polyethylene Thermoplastic
Colors	Green, Black, Brown, Gray, White, Redwood, Blue, Desert Sand

Accessories, Framework, and Fittings...

for a complete fencing solution

Master Halco® is dedicated to providing a complete range of products for every fencing application. From temporary fencing to high security accessories, and automated gate systems to privacy screening, you'll find a solution that will fit any specific requirement for commercial or residential jobs. All products are constructed to the highest quality standards to deliver optimum performance and ensure efficient installation.

As the leader in the chain link fencing market, you can look to Master Halco with confidence as your one-stop-shop for all high quality chain link fencing products.

Kennels



High Security



Accessories




Temporary Panels



Gates




Privacy Slats

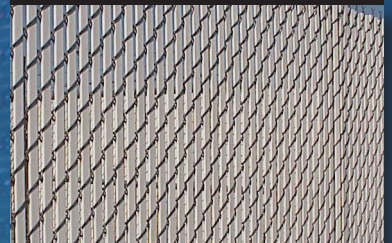

Framework & Fittings

The proper framework and fittings is a must for every job. Master Halco stocks the largest selection of imported and domestic pipe, tube, and fittings in the nation to coordinate with our chain link fabric styles, offering a complete fencing solution.

Whether you are looking to complete a small residential job or a large commercial one, Master Halco offers the perfect combination of products. Below are just a few examples of coordinating pipes, tubes, and fittings available.



Pipe & Tube

- CQ20
- Structural
- Dura-Tube 16 Gauge
- RQ 15
- DQ 40
- HQ 30
- Dura-Lite 18 and 17 Gauge
- Schedule 40 Full Weight

Fittings

- Pressed Steel
- Aluminum
- Die Cast
- Malleable
- Heavy Mil Color
- Polyester Coated Color





Fence & Deck Supply

Master Halco® ... offers you more

As North America's largest fencing and decking distributor, Master Halco consistently works to bring you the most comprehensive product offerings in the industry. Every project is different, and we strive to present you with the options that you need to make the best product choice. Our product line-up is comprehensive, in-stock, and ready for your review.

Contact your nearest Master Halco location and experience why we are the go-to resource for fencing and decking solutions, year after year.

**CHAIN LINK | ORNAMENTAL | VINYL | WOOD | HIGH SECURITY | ACCESS CONTROL
GATES | TEMP FENCE | AGRICULTURAL | DECKING & RAILING | OUTDOOR STRUCTURES**




Fence & Deck Supply

MasterHalco.com

Branch service centers are located throughout North America.

046067 ©1/26

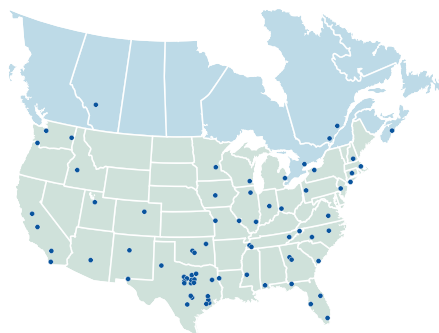

Scan me!

Find your local
Master Halco branch
and order today!